

Innovato Collection

Data Sheet: Glue Down LVT

Colors:	Available in 9 standard colors, custom colors are available upon request
Sizes:	7.25"x48", 9"x48"
Overall Thickness:	2mm/3mm
Wear Layer:	6-mil, 8-mil, 12-mil, 20-mil-(2.5mm thickness or higher)
Embossment:	Deep Embossed/Embossed in Register
Surface Protection:	Ceramic Bead
Construction:	Made with 100% Virgin Material. Apply with a pressure sensitive adhesive
Installation Method:	Glue Down /with Adhesive

Minimum Order Quantity: Container Sizes

- 2mm Glue Down-57,600
- 3mm Glue Down-43, 200


Contact Us

(512) 503-2106

Email: info@advancedflooringc.com

 www.advancedflooringc.com

Glue Down Specifications

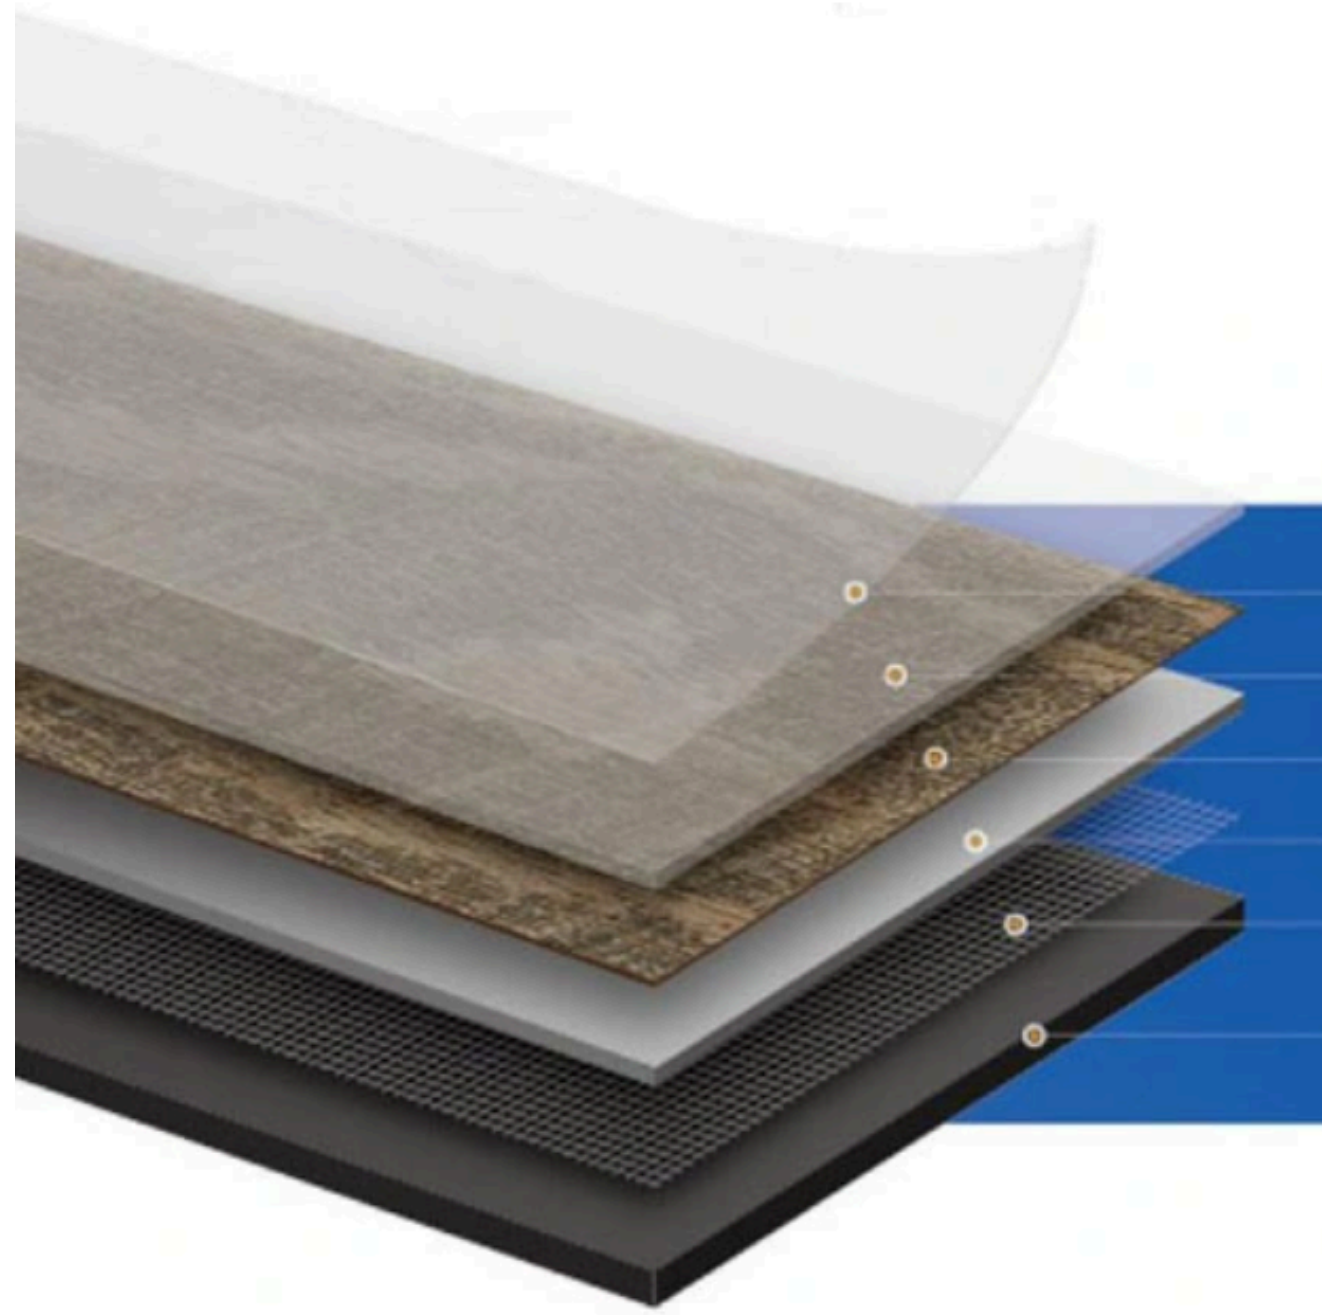

Ceramic Bead UV Protection
Wear Layer
Print Layer
Stability Layers
FiberGlass layer
Backing Layer

Test	Results
ASTMF2055 Size 7 Tolerance	Pass
ASTMF386 Thickness	Pass
ASTMF2055 Squareness	Pass
ASTMF1914 Residual Indentation	Pass Average <8%
ASTMF2199 Dimensional Stability	Pass .011 in/ft < .020 in/ft
ASTMF925 Chemical Resistance	Pass No Change/slight change
ASTMF1514 Resistance to Heat	Pass < 8 *delta E average
ASTMF1515 Resistance to Light	Pass < 8 *delta E average
ASTME648 Critical Radiant Flux	Class 1 (<.45 w/cm2)
ASTME662 Optimal Smoke Density	Passes <450
ASTM C1028 Slip Resistance	Pass ADA Compliant (>.50)
ASTMF970 Static Load	Pass 1000 psi/250 psi (<.005 in)

About the Innovato Collection

Sizes & Systems

Item	Plank Size	Thickness	Sq Ft Per Carton	Cartons Per Pallet	Sq Ft Per Pallet	Sq Ft Per Container
LVT Glue Down	7.25"x48"	2mm	58	40	40	46,379
LVT Glue Down	9"x48"	2mm	48	44	2880	57600
LVT Glue Down	7.25"x48"	3mm	38	40	1545.95	30919
LVT Glue Down	9"x48"	3mm	36	44	31667	31667

****Please allow 12-16 weeks for delivery**

****Financing is available with approved credit.**



Container Direct Services

What makes us unique for your Container Direct LVT Flooring

TQM: Advanced Flooring conducts a Our imported LVT flooring delivers premium Total Quality Management (TQM) standards — consistently superior raw materials, precise manufacturing tolerances, and rigorous in-process inspections, — giving you overseas-high quality LVT that outperforms domestic options in durability, appearance, and reliability while keeping your costs competitively low.

